
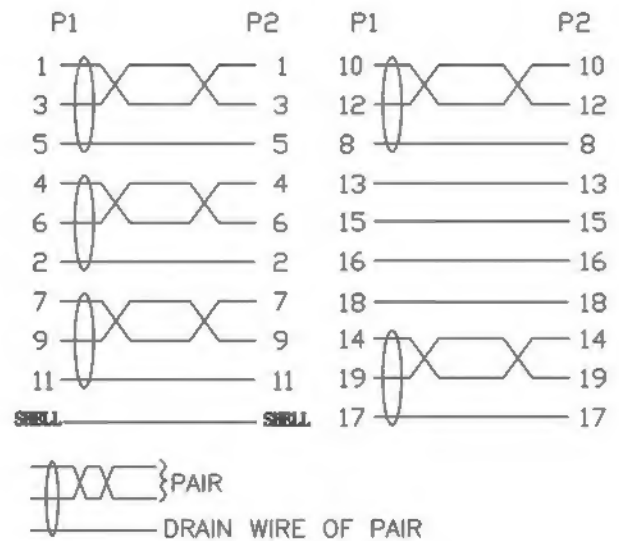


## PIN OUT

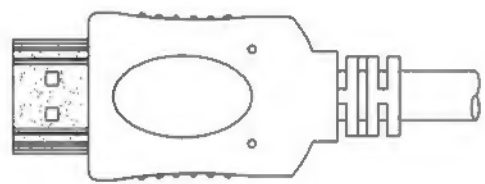

## REQUIREMENTS:

- 1:100% short and open testing.
- 2:Test conditions  
DC300V /10MS  
Insulation resistance 10MΩ(Min)  
Conduction resistance 5Ω(Max)
- 3:1080P testing.

| ④   | OUTER MOLDED | BLACK 45P PVC  | 0.028 | KG   |
|-----|--------------|--|-------|------|
| ③   | INTER MOLDED | LDPE   | 0.028 | KG   |
| ②   | CONNECTOR    | HDMI A TYPE MALE BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN | 2     | PCS  |
| ①   | CABLE        | (1P*30#+D+AL+MYLAR)*5C+4C*30#+ADB<br>OD:6.0±0.15 JACKET:BLACK PVC  | 0.5   | M    |
| NO. | MATERIAL     | DESCRIPTIONG   | QTY.  | UNIT |

| Ltemref     | Quantity   | Title/Name,designation,material,dimension etc |                       |              |           | Article No./Reference |  |
|-------------|------------|---|-----------------------|--------------|-----------|-----------------------|--|
| Designed by | Checked by | Approved by - date                            | File name             | Date         | Scale     | 26-7005LS             |  |
|             |            | MARCH 4.2012                                  | 14 HDMI M/M TO Lw0.5M | MARCH 4.2012 | FREE      |                       |  |
|             |            |   |                       | 26-7005LS    | Edition 1 | Sheet 1/2             |  |